



	Symbol / symbol	Wert / value	Einheit / unit
Anfangspermeabilität / initial permeability	μ_i	$80 \pm 25\%$	-
Flussdichte / flux density	B_{max}	≥ 380	mT
bei Feldstärke / at field strength	H_{max}	5000	A/m
Remanenz / remanence	B_r	≥ 170	mT
Koerzitivfeldstärke / coercive force	H_c	≤ 375	A/m
Curie-Temperatur / Curie temperature	T_c	≥ 400	°C
Bez. Temperaturbeiwert / rel. temperature coefficient	α_r		$10^{-6}/K$
bei / at -25°C ... +25°C		≤ 80	
+25°C ... +70°C		≤ 10	
Bez. Verlustfaktor / rel. loss factor	$\tan\delta/\mu_i$		10^{-6}
bei / at 0,1 MHz		≤ 100	
0,3 MHz		≤ 120	
1 MHz		≤ 210	
Hysteresebeiwert / hysteresis loss coefficient	η_B	≤ 2	$10^{-6} / mT$
Gleichstromwiderstand / resistivity	ρ	$\geq 10^5$	Ωm
Sinterrohddichte / sintered density	γ	$\approx 4,5$	g/cm^3

Komplexe Permeabilität als Funktion der Frequenz
Complex permeability vs. frequency

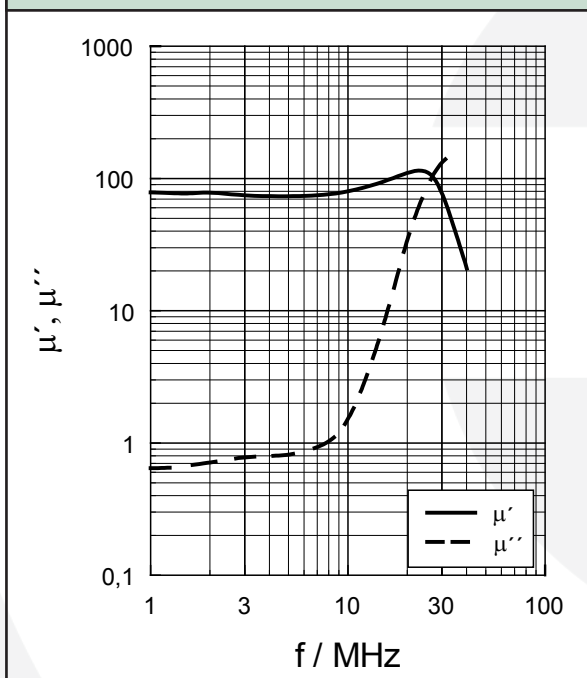



Anfangspermeabilität als Funktion der Temperatur
Initial permeability vs. temperature

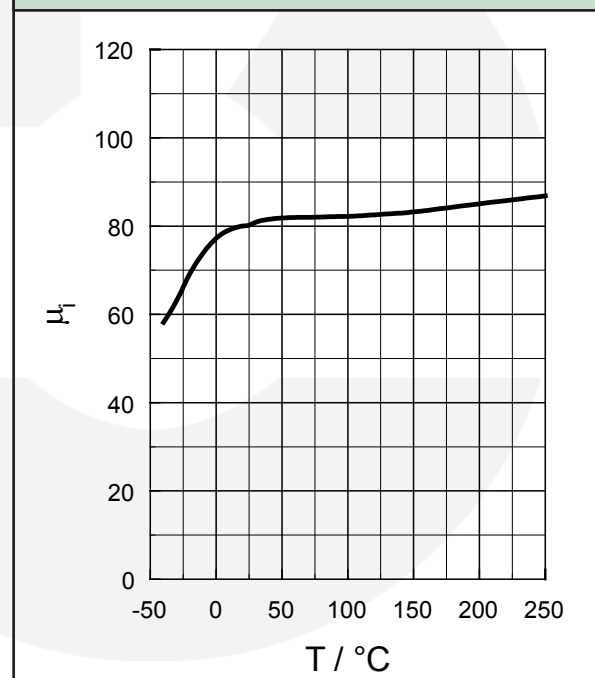

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51- 50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de

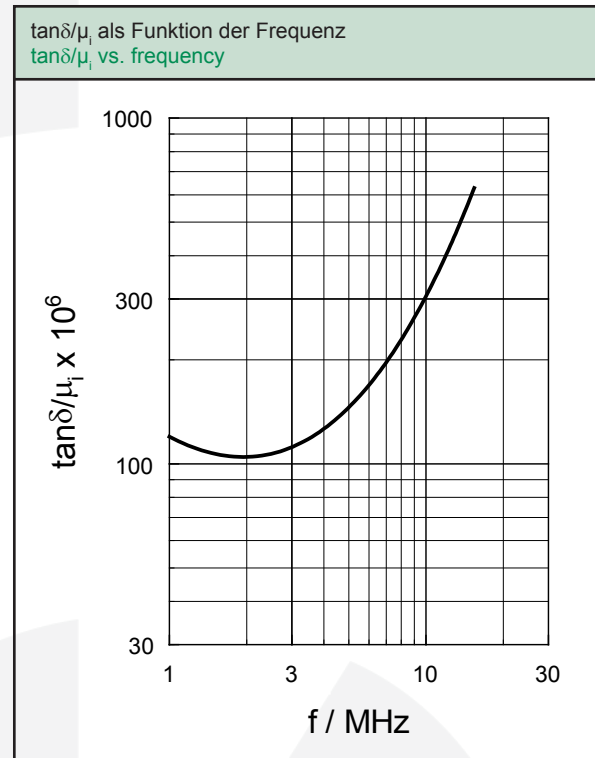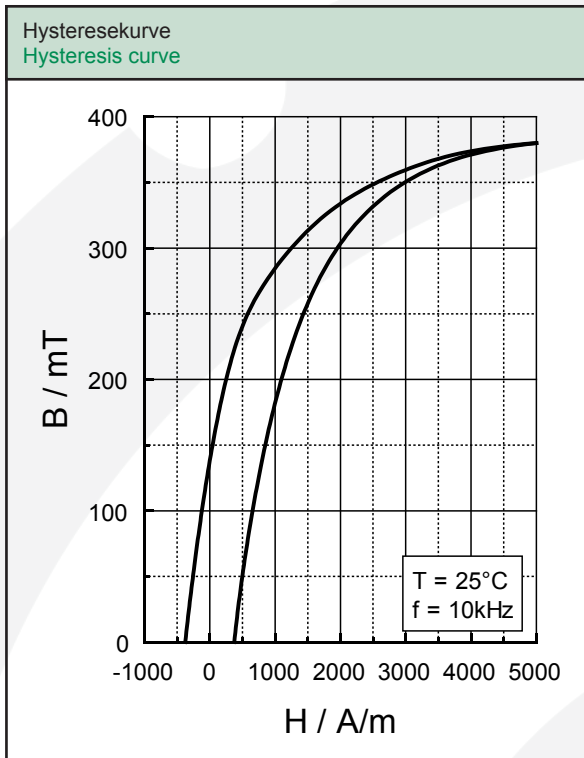

All information given without liability. If you require further information about our products, do not hesitate to contact our representatives, or visit our homepage, www.kaschke.de.

Kaschke Components GmbH

Rudolf-Winkel-Straße 6 · 37079 Göttingen · Germany
Fon +49 (0) 5 51-50 58-6 · Fax +49 (0) 5 51-65 75 6
kaschke.de