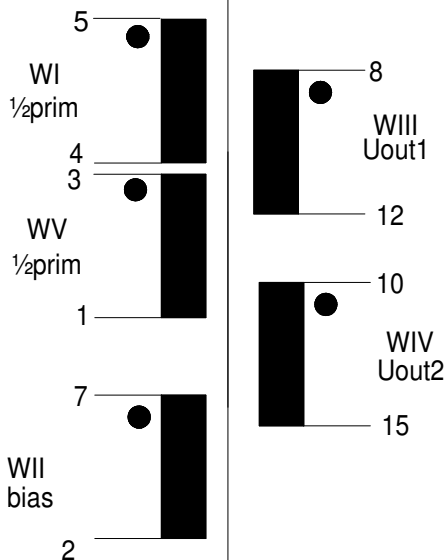
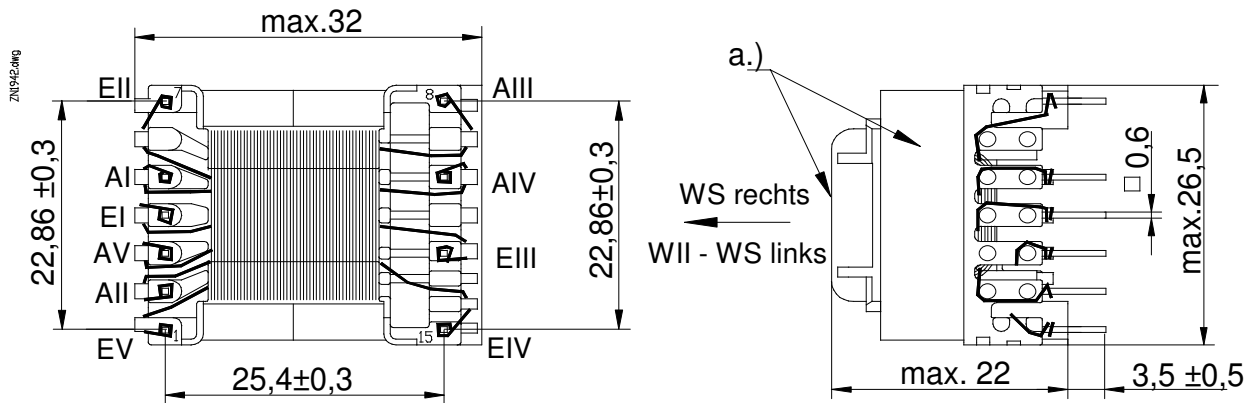


Customer:
Kaschke Göttingen

 Part designation:
SP-EF 25

 Customer part no.:
SKNY280-13,8-28


Core / material / air gap / AL	E25/7 K2006 or equiv.	
Nominal inductance	LI+LV= 1,28mH ±10%	
maximum transmissible power	28W(TNY280)	
Working frequency	132 kHz	
Transformation ratio	75 : 12 : 8 : 8	
dielectric strength (50Hz/2s)	Prim-Sec= 3,75kVeff/50Hz	
Nominal Current		
Design in comp. with standard	EN61558/EN60950	
Working / storage temperature	-25 °C- +120 °C	-25 °C- +85 °C
Miscellaneous	DIN 40040	
leakage inductance	max. 30 µH	

Remarks : **a.) marking**
Uout1 = Uout2= 13,8V
Uout1 + Uout2= 27,6V

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/22,5 °C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

07.11.2006

Design regulation no:

095.931

Index:

00
PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature