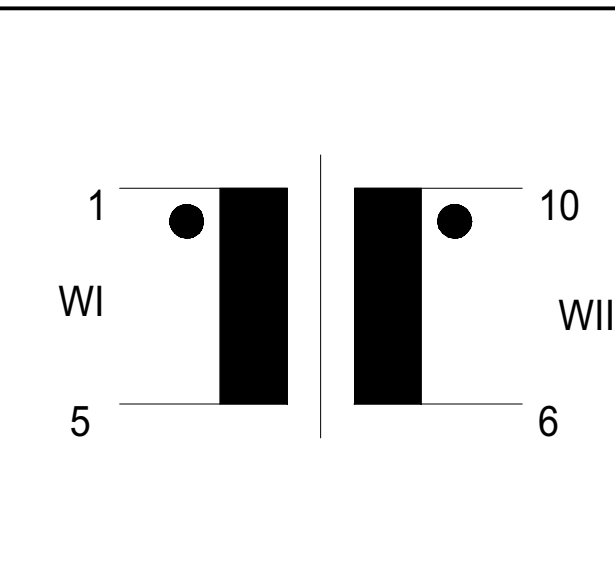
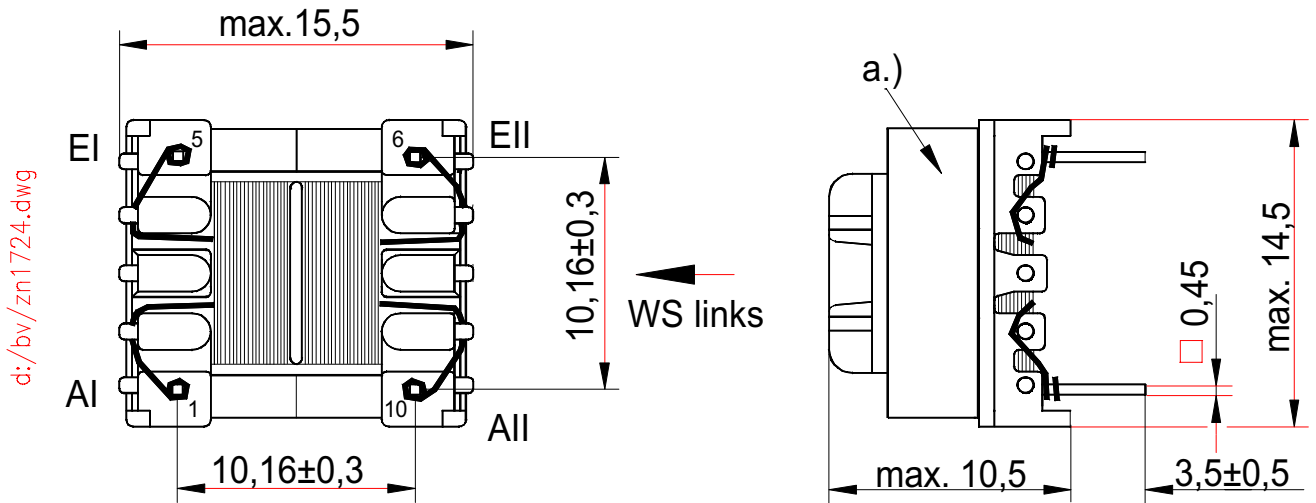


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-E 13/4

 Customer part no.:
Type


Core / material / air gap / AL	E13/4 K4000 or equiv.	
Nominal inductance	L= 2 x 22mH ±30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1:1	
dielctric strength (50Hz/2s)	Prim-Sec = 0,5kV/50Hz/2sec	
Nominal Current	0,28 A	
Design in comp. with standard	S96	
Working / storage temperature	-25°C- +125°C	-25°C- 85°C
Miscellaneous	F (DIN 40040)	
R DC	max. 3,0 Ohm	

 Remarks : **a.) marking**

Measuring device of L: W&K 3260A			Measuring conditions of L: 50mV/10kHz/22,5°C			
Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: Uwe Dickhut	Date: 06.11.2006	Design regulation no.: 071.923	Index: 01
---	----------------------------	--	---------------------

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature