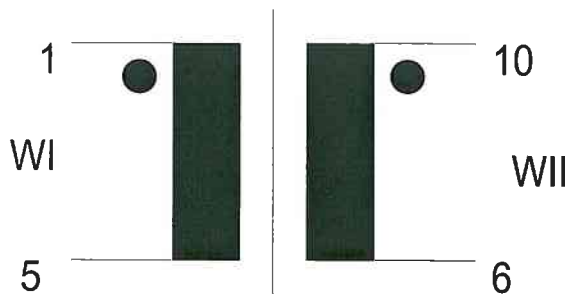
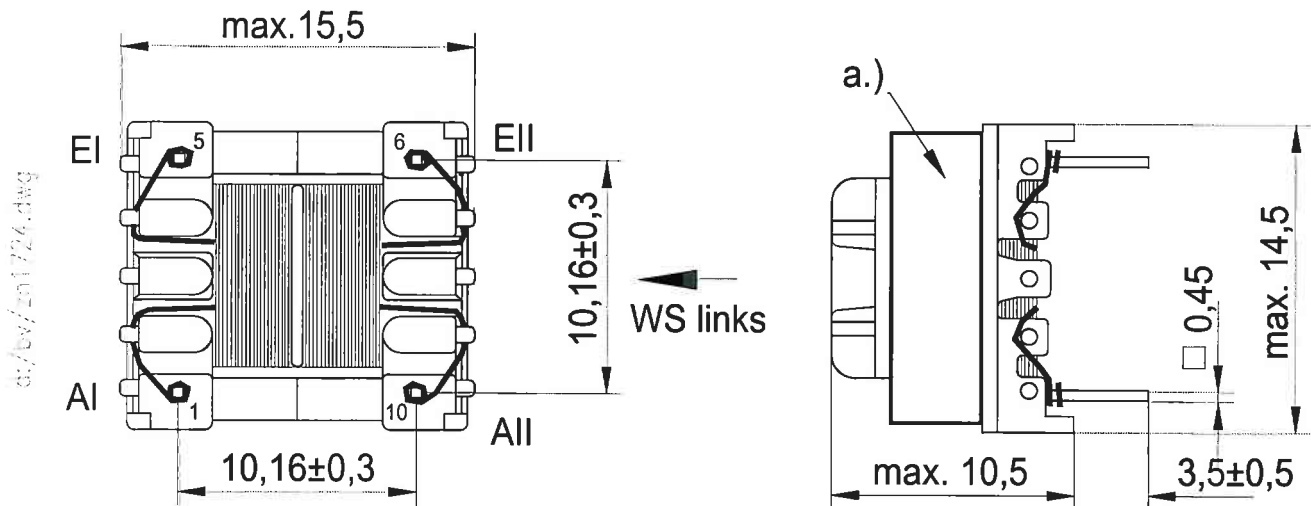


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-E 13/4

 Customer part no.:
CM 0,26-27


Core / material / air gap / AL	E 13/4 K4000 or equiv.	
Nominal inductance	2 x 27mH±30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1:1	
dielectric strength (50Hz/2s)	Prim-Sec = 0,5kV/50Hz/2sec	
Nominal Current	260mA	
Design in comp. with standard	S06	
Working / storage temperature	-25°C- +125°C	-25°C- 85°C
Miscellaneous		
R DC	max. 3,8 Ohm	

Remarks : a.) marking

Measuring device of L: W&K 3245

Measuring conditions of L: 50 mV/10 KHz

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

14.09.2004

Design regulation no:

071.924

Index:

00
PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature