
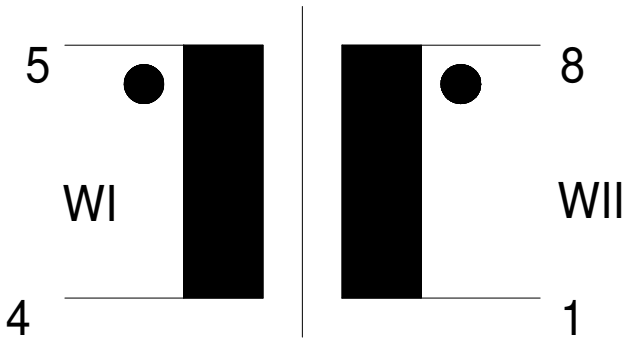


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:

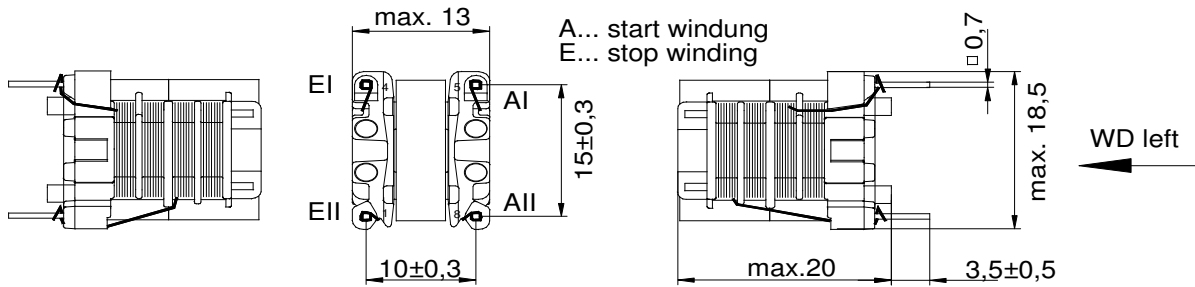

Core / material / air gap / AL	E16/5 / K6000 or equiv. / 0	
Nominal inductance	L= 2x8,75mH -15%/+30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1 : 1	
dielectric strength (50Hz/2s)	1,5kV (WI - WII)	
Nominal Current	0,9 A	
Design in comp. with standard	.	
Working / storage temperature	-25°C- +125°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	

Remarks : **a.) Aufdruck bei Serienlieferung.**

Measuring device of L: **W&K 3245** Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Ottmar Pätzold** Date: **18.02.2005** Design regulation no: **093.216** Index: **03**

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature